# Accessories & Parts 121-ABNF



# **Product Type**

ECAST® thermostatic mixing valve for single or multiple faucet installations

# **Features & Specifications**

- Adjustment cap with locking feature, includes inlet filter washers and cap for three-port applications
- Bronze body construction, corrosion-resistant internal components
- Standard 3/8" compression Inlets and outlets
- Integral inlet check valves to protect against cross-flow

### **Warranty**

### **Codes & Standards**

S ASME A112.18.1/CSA B125.1


| Job Name               |                               |
|------------------------|-------------------------------|
| Item Number            |                               |
| Section/Tag            |                               |
| Model Specified        |                               |
| Architect              |                               |
| Engineer               |                               |
| Contractor             |                               |
| [ ] Submitted as Shown | [ ] Submitted with Variations |
| Date                   |                               |

No Image Available



### **Architect/Engineer Specification**

Chicago Faucets No. 121-ABNF, ECAST® Thermostatic Mixing Valve. Standard 3/8" compression inlets and outlets. Integral inlet check valves to protect against cross-flow. Adjustment cap with locking feature. Bronze body construction. Double throttling design to control both hot and cold water supply to the mixed outlet. Corrosion resistant internal components. Solid wax hydraulic principle thermostat. Thermostat controls both hot and cold water. Provided with cap for three port application. Installs between the stop valves and faucet. Inlet filter washers to filter out debris. Single use or multiple faucet installations. ECAST® construction with less than 0.25% lead content by weighted average.

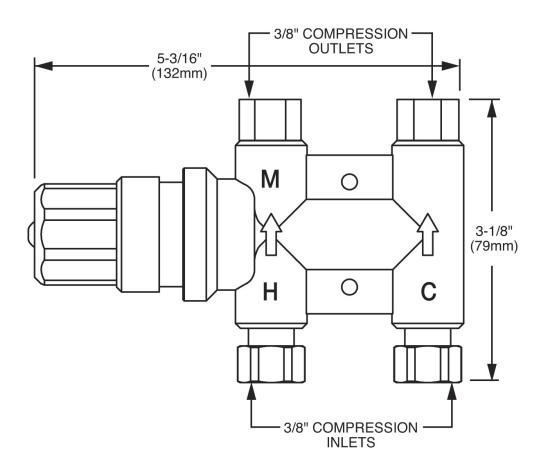

#### **Operation and Maintenance**

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

