Accessories & Parts
E24JKCP

CHICAGO FAUCETS
Geberit Group

Product Type

Inline atmospheric vacuum breaker

Features & Specifications

- ASSE 1014 compliant. Vacuum breakers for hand showers are used for non-continuous pressure, health hazard applications and are backsiphonage/backflow preventers.
- 1/2"-14 NPSM female inlet
- 1/2"-14 NPSM male outlet
- This device is not to be used under continuous pressure or where there is a possibility that a back pressure condition may develop
- This device should only be used in areas where spillage of water will not cause damage
- Complies with the requirements of the Buy American Act of 1933.

Performance Specifications

- Rated Operating Pressure: 125 PSI maximum working pressure
- Rated Operating Temperature: 140°F (60°C) maximum temperature

Warranty

Codes & Standards

- ASSE 1014

Job Name _____

Item Number _____

Section/Tag _____

Model Specified _____

Architect _____

Engineer _____

Contractor _____

[ ] Submitted as Shown [ ] Submitted with Variations

Date _____




BUY AMERICAN ACT COMPLIANT


2100 South Clearwater Drive
Des Plaines, IL
P: 847/803-5000
F: 847/803-5454
Technical: 800/TEC-TRUE
www.chicagofaucets.com

E24JKCP

Architect/Engineer Specification

Chicago Faucets model no. E24JKCP, In-line Atmospheric Vacuum Breaker. Polished chrome finish. 125 PSI maximum working pressure. 140°F (60°C) maximum operating temperature. Not Intended for Continuous Pressure Applications: This device is not to be used under continuous pressure or where there is a possibility that a back pressure condition may develop. This device should only be used in areas where spillage of water will not cause damage. Complies with ASSE 1014.

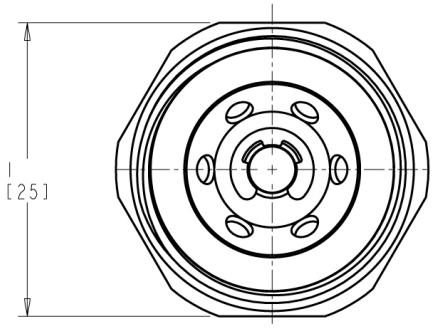

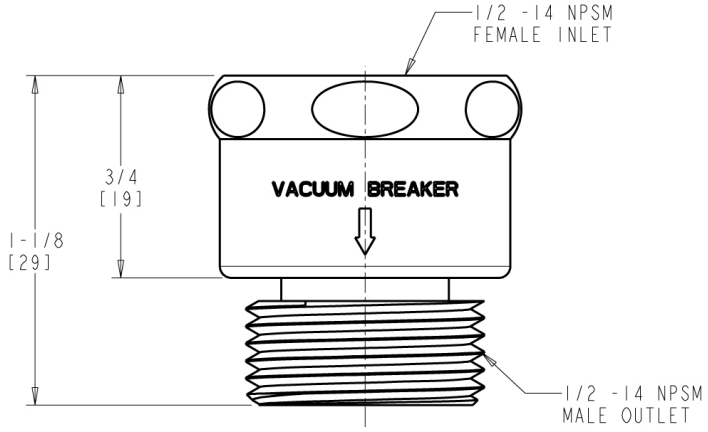

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

2100 South Clearwater Drive
Des Plaines, IL
P: 847/803-5000
F: 847/803-5454
Technical: 800/TEC-TRUE
www.chicagofaucets.com