Safety Fittings 8205-NF



Product Type

Safety eye/face wash, drench shower fitting

Features & Specifications

Performance Specification

Warranty

- 1-Year Limited Finish Warranty
- 1-Year Limited Material Warranty

Codes & Standards

• & ADA ANSI/ICC A117.1


Job Name	
Item Number	
Section/Tag	
Model Specified	
Architect	
Engineer	
Contractor	
[] Submitted as Shown	[] Submitted with Variations
Date	





Architect/Engineer Specification

Chicago Faucets No. 8205-NF, Eye/Face Wash and Safety Drench Shower, wheelchair accessible, floor-mounted, with stainless steel pull rod. Two 1-1/4" NPT female thread inlets. 1-1/4" NPT female waste. Stainless steel eye wash receptor. 90" maximum overall height. Highimpact ABS plastic Softflo spray head with cover.

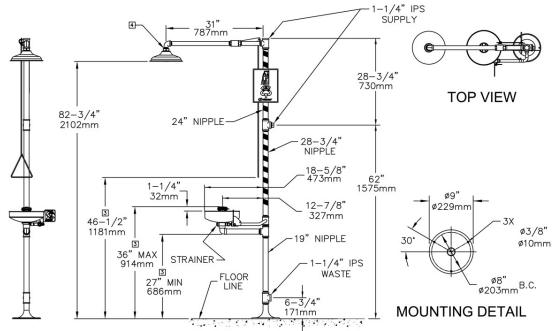

- DIMENSIONS MAY VARY BY ± 1/2 INCH [13mm].
- DIMENSIONS MAY VARY 9Y 1/12 INCH [1/3mm].

 TO COMPLY WITH ANSI 2358 1-2099 FOR EMERGENCY EYEWASH OR EYE/FACE WASH AND SHOWER EQUIPMENT:

 UNIT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND ACCEPTABLE PLUMBIN PRACTICES.

 EYEWASH OR EYE/FACE WASH SHALL BE POSITION DEED WITH MOZIZES NOT LESS THAN 8.8.3 CLI (31 III.) AND NO GREATER THAN

 114.2 CM 45 N.) FROM SURFACE ON WHICH USER STANDS AND 15.3 CM (61 IN.) MINIMUM FROM WALL OR NEAREST OBSTRUCTION.

 SHOWER SHALL BE POSITIONED SO THAT SHOWER HEAD IS NOT LESS THAN 208.3 CM (62 IN.) NOR MORE THAN 24.3 c CM (66 IN.)

 FROM SURFACE ON WHICH USER STANDS.

 SHOWER SHAPP APTEREN SHALL HAVE A MINIMUM DIAMETER OF 50 8 CM (20 IN.) AT 152.4 CM (60 IN.) AROVE SURFACE ON WHICH

 USER STANDS, AND CENTER OF SPRAY PATTERN SHALL BE LOCATED AT LEAST 40.6 CM (16 IN.) FROM ANY OBSTRUCTION.

- [3] THESE DIMENSIONS MUST BE MAINTAINED TO MEET WHEELCHAIR ACCESSIBILITY REQUIREMENTS AND STILL COMPLY WITH ANSI
- 4 DO NOT USE REGULAR PIPE SEALANT, IF NECESSARY, USE DOW CORNING 832 SEALANT. PLACING 5 SMALL BEADS ON THE MALE THREADS. JUST ABOVE THE FIRST THREAD.

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

